




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

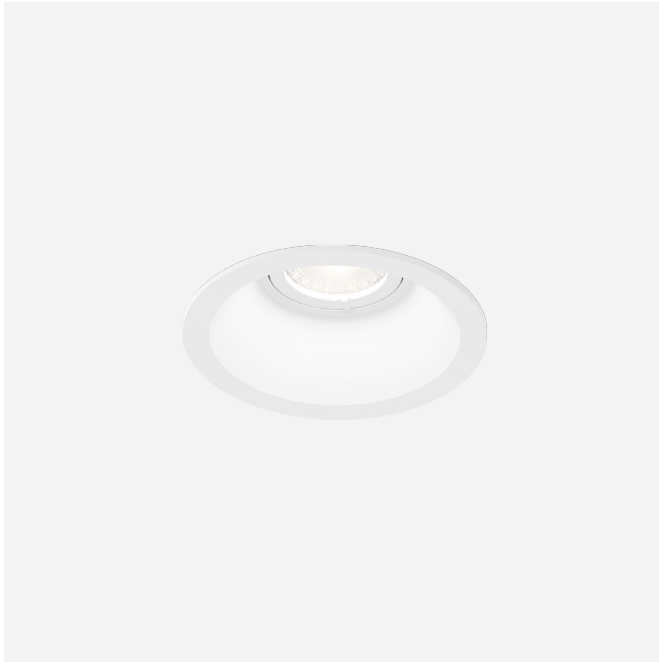

Round ceiling recessed downlight made from die-cast aluminium; surface White Matt; powder coated, matt texture; RAL 9010; installation without tools using wire springs; suitable for ceiling thickness of 4-23 mm; recessed depth 50 mm; beam angle 31°; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; degree of protection IP20; Class 3; IC rated; UGR ≤ 16 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; driver not included; fits into Kaiser ThermoX® 9320-11; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



GENERAL

Ceiling _____

Recessed _____

White Matt _____

RAL 9010 ^a _____

IP20 _____

IC rated _____

Interior _____

CIE flux code: 98 100 100 100 100 _____

LED

2700 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

OPTICAL

Standard _____

beam angle 31° _____

ELECTRICAL

excl. driver _____

17 V _____

inset 5.9 W _____

Class 3 _____

PHYSICAL

diameter 80 mm _____

height 45 mm _____

0.04 kg _____

wire springs _____

CUTOUT

diameter 68-70 mm _____

min. ceiling thickness 4 mm _____

max. ceiling thickness 23 mm _____

recessed depth 50 mm _____


^a Colour may deviate slightly due to production conditions.

MEASURED DRIVER

350mA _____

615 lm _____

7.9 W _____

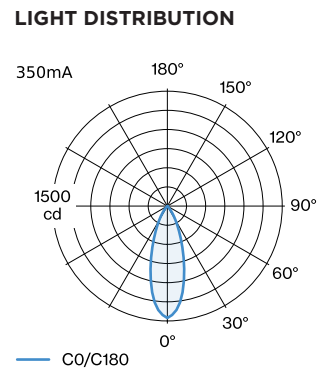

[153561W3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



CONE DIAGRAM

standard 34° 350mA

h (m)	E0° (lx)	ø (m)
1	1460	0.61
2	370	1.23
3	160	1.84
4	90	2.46
5	60	3.07

Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL ACCESSORIES

Driver

Type	Voltage	L·W·H (MM)	Item number
6W 350mA 8.6-18V	8.6-18V	67·39·22	90213303
10W 350mA 1-10V dim	14-28V	101.5·51·29.5	90223401
10W 350mA phase-cut dim	12-28V	102·38·21	90223402
14W 350mA 2.5-42V	2.5-42V	145·33·21	90243501
17W 350mA 10-49V DALI	10-49V	108·52·22	90243601

[153561W3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.