




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



Ceiling surface spotlight made from die-cast aluminium; with rectangular base; surface Bronze; wet painted, matt smooth; inner ring black; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; CRI ≥ 90; beam angle 31°; 220 - 240 V; 350° rotatable and 90° tiltable; degree of protection IP20; Class 1; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

GENERAL

Ceiling _____

Surface _____

tilt max 90 ° _____

rotation 350 ° _____

Bronze _____

IP20 _____


Interior _____

2890 lm _____

CIE flux code: 99 100 100 100 _____

100 _____

LIGHT DISTRIBUTION



LED

2700 K _____

CRI ≥ 90 _____

L70 / 55000h _____

initial MacAdam ≤ 2 SDCM _____

OPTICAL

Standard _____

beam angle 31° _____

ELECTRICAL

phase-cut dim _____

220 - 240 V _____

system 40 W _____


Class 1 _____

PHYSICAL

diameter 35 mm _____

height 55 mm _____

1.34 kg _____

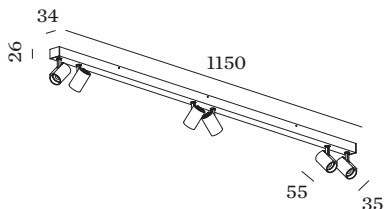

[176064Q3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



CONE DIAGRAM

standard 31°

h (m)	E0° (lx)	ø (m)
1	1390	0.55
2	350	1.10
3	150	1.65
4	90	2.21
5	60	2.76

OPTICAL ACCESSORIES

Honeycomb Louver

Type

BLIEK PETIT | CENO | LECA | PIRRO

Colour

Black

Ø (MM)

29

Item number

90051131