





PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

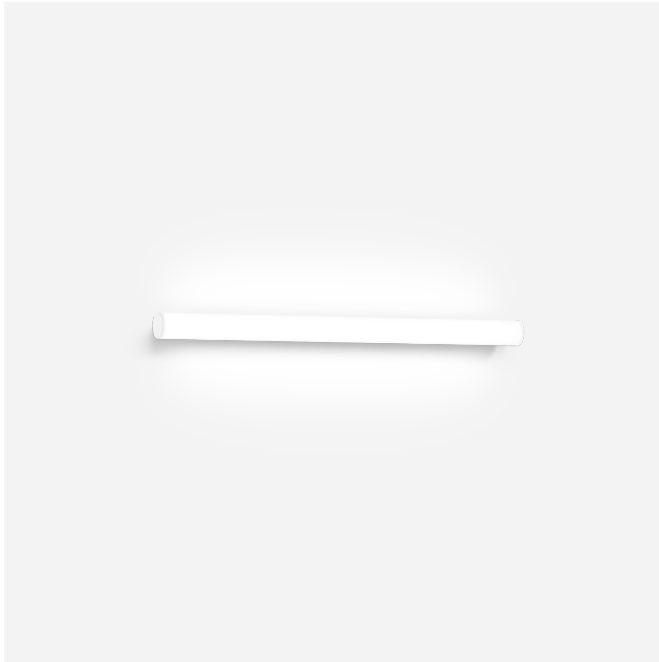

Tubular wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; opal PMMA; PCB 3-step binning; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; inclusive output selector (choose between low and high luminosity); degree of protection IP44; Class 1; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



GENERAL

Wall _____
 Surface _____
 White Matt + Opal PMMA _____
 IP44 _____
 Interior _____
 CIE flux code: 28 54 78 50 100 _____

LED

2700 K _____
 CRI ≥ 90 _____
 L80 / 50000h _____
 initial MacAdam ≤ 3 SDCM _____

ELECTRICAL

incl. output selector | phase-cut dim _____
 220 - 240 V _____
 system 8.7 5.8 W _____
 Class 1 _____

PHYSICAL



length 614 mm _____
 width 60 mm _____
 height 40 mm _____
 0.65 kg _____

MEASURED DRIVERS

Low Output _____
 535 lm _____
 5.8 W _____

High Output _____
 920 lm _____
 8.7 W _____

LIGHT DISTRIBUTION



[‘328288W3’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.97	0.94	0.91	0.89	0.86
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.