




PROJECT

TYPE

NOTES

QUANTITY

DATE

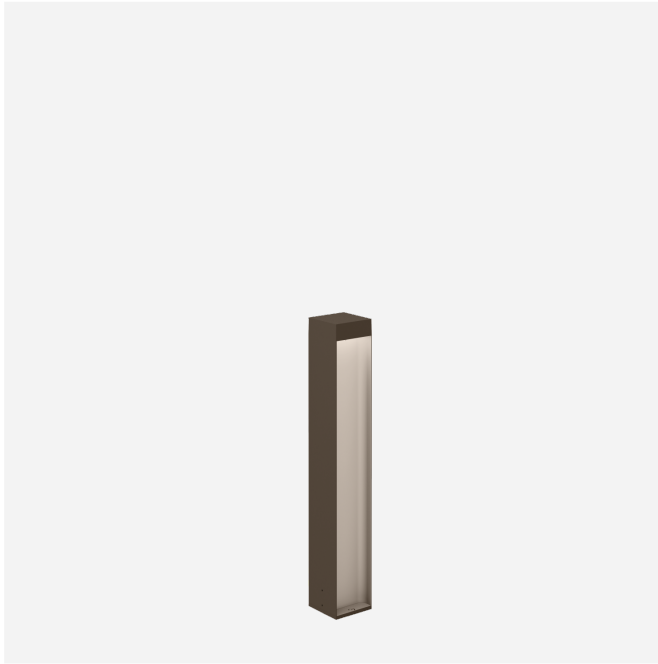

LUMINAIRE

Floor _____
 Surface _____
 Bronze _____
 IP65 _____
 610 lm _____

LED Module

3000 K _____
 CRI ≥ 80 _____
 ≤ 3 SDCM (initial MacAdam) _____

Optical

Asymetric _____

Electrical


220 - 240 V _____
 system 12.0 W _____
 Class I _____
 Standard _____

Physical

length 75 mm _____
 width 75 mm _____
 height 28 mm _____
 0.3 kg _____



Floor surface mounted luminaire made from die-cast aluminium; surface Bronze; powder coated; matt texture; PCB 3-step binning; light colour 3000 K; CRI ≥ 80; 220 - 240 V; degree of protection IP65; Class 1; fixation base not included; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



[7584A4Q4] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



BASE

Pole 250

Type	Colour	Voltage	L-W-H (MM)	Item number
GATE CARRÉ 2.0	Anthracite Grey		75-75-250	910114A0
GATE CARRÉ 2.0	Bronze		75-75-250	910114Q0

Pole 450

Type	Colour	Voltage	L-W-H (MM)	Item number
GATE CARRÉ 2.0	Anthracite Grey		75-75-450	910115A0
GATE CARRÉ 2.0	Bronze		75-75-450	910115Q0

Pole 650

Type	Colour	Voltage	L-W-H (MM)	Item number
GATE CARRÉ 2.0	Anthracite Grey		75-75-650	910116A0
GATE CARRÉ 2.0	Bronze		75-75-650	910116Q0